

#### MHB MS Series--Small-size batteries





- 100% before shipment testing, stable and reliable long-term quality
- patented grid alloy formula and updated manufacturing technique
- completely sealed and maintenance-free, low self-discharge
- Excellent charging and re-charging acceptance
- Cycle use: More than 260 cycles at 100% DOD
- Floating & standby use: 3-5 years

#### Application:


- Alarm System
- Cable Television
- Communication Equipment
- Emergency Power System
- Security System
- Medical Equipment
- UPS
- Power tools
- Control Equipment
- Toys

#### Construction:

- Component .....Raw material
- Positive .....Lead dioxide
- Negative .....Lead
- Container .....ABS
- Cover .....ABS
- Sealant .....Epoxy
- Safety valve .... Rubber
- Terminal .....Copper
- Separator .....Fiber glass
- Electrolyte .....Sulfuric acid

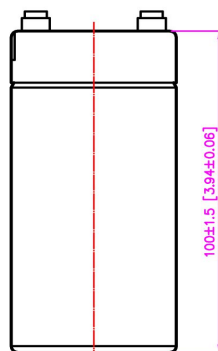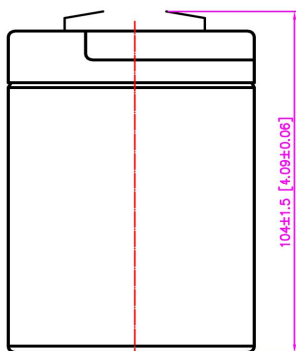

F1 Terminal




F2 Terminal


#### Specification:

Battery Model	MS 5-6 6V5.0AH			
Designed Floating Life	3~5 Years			
Capacity (25°C)	20HR(0.25A,5.25V)	10HR(0.481A,5.25V)	5HR(0.90A,5.25V)	1HR(3.00A,5.25V)
	5.00AH	4.81AH	4.50AH	3.00AH
Dimensions	Length	Width	Height	Total Height
	70mm (2.76inch)	47mm (1.85inch)	100mm (3.94inch)	104mm (4.09inch)
Approx. Weight	0.81Kg (1.79lbs) ±5%			
Internal Resistance	Full charged at 25°C : ≤16mΩ			
Self Discharge	2% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	7.20-7.50V(-15mV/°C), max. Current: 1.50A		6.75-6.90V (-10mV/°C)	

### Terminal Voltage (V) and Discharge Time

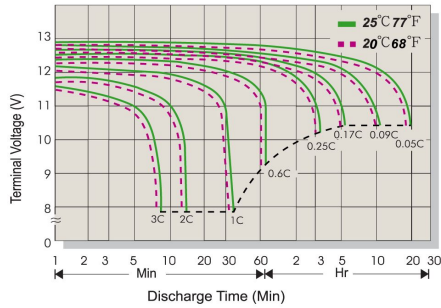

### Capacity Retention Characteristic

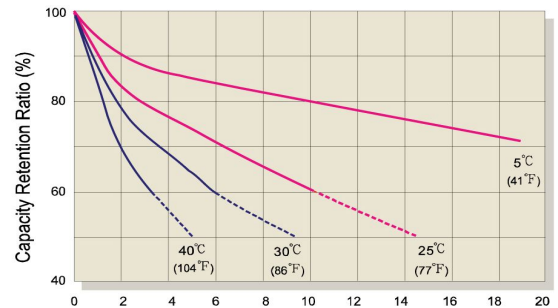


### Battery Voltage and Charge Time for Standby Use




### Battery Voltage and Charge Time for Cycle Use



### Tickle(or Float) Service Life

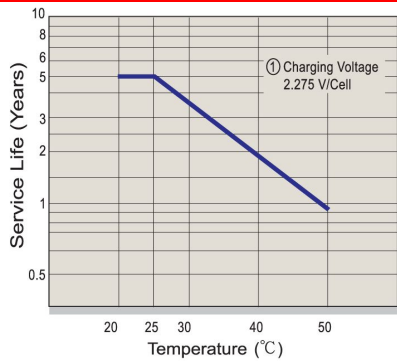

### Cycle Service Life

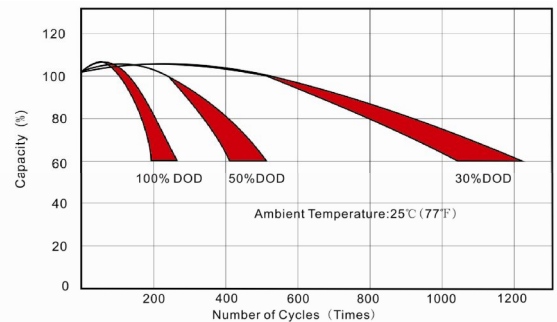

### Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	14.27	10.28	7.87	4.97	2.88	1.65	1.26	1.010	0.867	0.707	0.463	0.241
1.80V/Cell	14.54	10.48	8.02	5.07	2.94	1.68	1.29	1.029	0.883	0.720	0.472	0.245
1.75V/Cell	14.82	10.68	8.17	5.16	3.00	1.72	1.31	1.048	0.900	0.734	0.481	0.250
1.70V/Cell	16.15	11.32	8.66	5.37	3.05	1.75	1.34	1.067	0.916	0.746	0.490	0.254
1.67V/Cell	17.78	12.28	9.39	5.67	3.08	1.77	1.35	1.078	0.925	0.754	0.495	0.257
1.60V/Cell	19.26	12.92	9.88	5.91	3.11	1.78	1.36	1.090	0.935	0.763	0.500	0.260

### Constant Power Discharge (CP, Unit: W) at 25°C (77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	27.83	20.05	15.34	9.70	5.63	3.22	2.46	1.97	1.69	1.38	0.90	0.47
1.80V/Cell	28.36	20.43	15.64	9.88	5.73	3.29	2.51	2.01	1.72	1.40	0.92	0.48
1.75V/Cell	28.89	20.82	15.93	10.07	5.84	3.35	2.56	2.04	1.75	1.43	0.94	0.49
1.70V/Cell	31.49	22.07	16.88	10.47	5.94	3.41	2.60	2.08	1.79	1.46	0.95	0.50
1.67V/Cell	34.67	23.94	18.32	11.05	6.01	3.44	2.63	2.10	1.80	1.47	0.96	0.50
1.60V/Cell	37.56	25.19	19.27	11.52	6.07	3.48	2.66	2.12	1.82	1.49	0.98	0.51