MHB BATTERY

VRLA Battery

MS 6-12 12V6.0AH

MS Series SLA Battery

MHB MS Series--Small-size batteries

- 100% before shipment testing, stable and reliable long-term quality
- patented grid alloy formula and updated manufacturing technique
- completely sealed and maintenance-free, low self-discharge
- Excellent charging and re-charging acceptance
- Cycle use: More than 260 cycles at 100% DOD
- Floating & standby use: 3-5 years

Application:

- Alarm System
- Cable Television
- Communication Equipment
- Emergency Power System
- Security System
- Medical Equipment
- UPS
- Power tools
- Control Equipment
- Toys

Construction:

- Component .....Raw material
- Positive .....Lead dioxide
- Negative .....Lead
- Container .....ABS
- Cover .....ABS
- Sealant .....Epoxy
- Safety valve .... Rubber
- Terminal .....Copper
- Separator .....Fiber glass
- Electrolyte .....Sulfuric acid

ISO14001 ISO9001 TB09075935 MH 47104

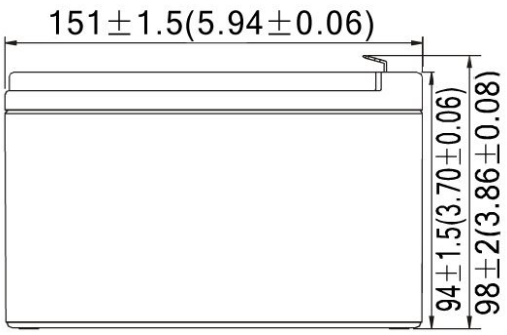



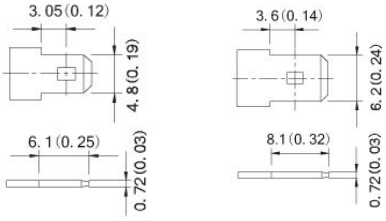

F1 Terminal F2 Terminal

Speification:

Battery Model	MS 6-12 12V6AH			
Designed Floating Life	3～5 Years			
Capacity (25℃)	20HR(0.30A,10.5V)	10HR(0.568A,10.5V)	5HR(1.02A,10.5V)	1HR(3.47A,10.5V)
	6.00AH	5.68AH	5.10AH	3.47AH
Dimensions	Length	Width	Height	Total Height
	151mm (5.94inch)	65mm (2.56inch)	94mm (3.70inch)	98mm (3.86inch)
Approx. Weight	1.95 Kg (4.30 lbs) ±5%			
Internal Resistance	Full charged at 25℃ : ≤38mΩ			
Self Discharge	3% of capacity declined per month at (25℃)			
Capacity Affected by Temp.(20HR)	40℃	25℃	0℃	-15℃
	102%	100%	85%	65%
Charge Voltage(25oC)	Cycle use		Float use	
	14.4-15.0V(-30mV/℃), max. Current: 1.80A		13.6-13.8V (-20mV/℃)	

FUJIAN MINHUA POWER SOURCE CO., LTD.

www.mhb-battery.com sales@mhb-battery.com info@mhb-battery.com

V-0 2011-11-20

MHB BATTERY

VRLA Battery MS 6-12 12V6.0AH

Terminal Voltage (V) and Discharge Time

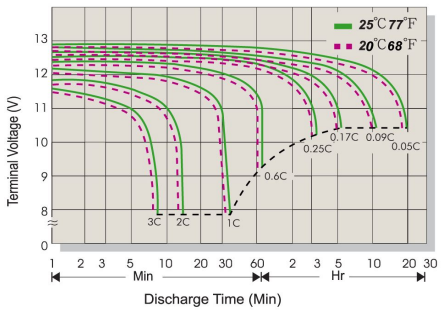

Capacity Retention Characteristic

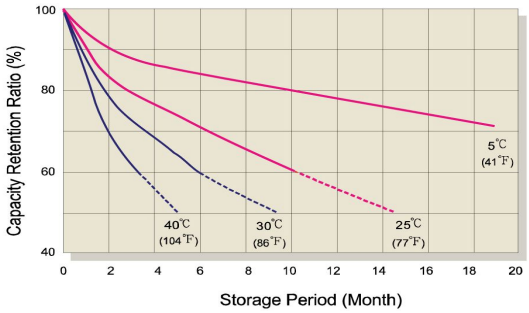

Battery Vlotage and Charge Time for Standby Use

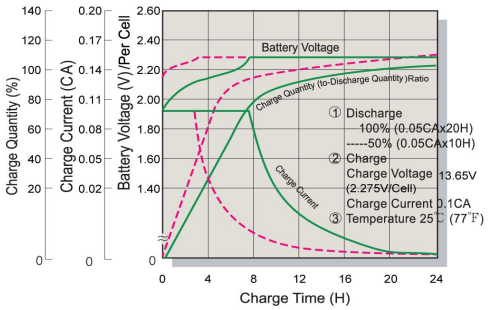

Battery Vlotage and Charge Time for Cycle Use

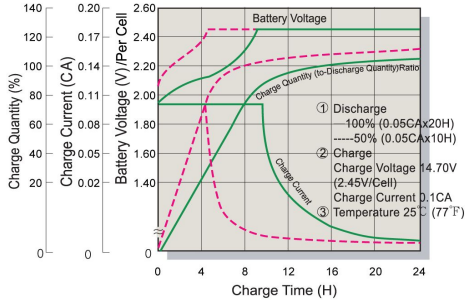

Tickle(or Float) Service Life

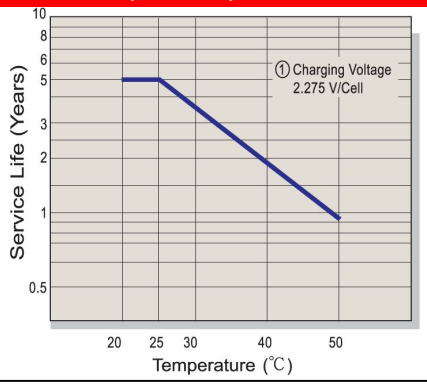

Cycle Service Life

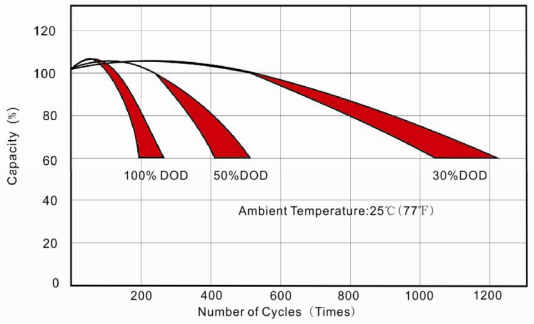

Constant Current Discharge(CC,Unit:A) at 25℃(77℉)												
F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	16.55	11.76	9.15	5.68	3.35	1.96	1.49	1.183	0.982	0.839	0.547	0.289
1.80V/Cell	16.86	11.99	9.33	5.79	3.41	1.99	1.52	1.205	1.001	0.855	0.558	0.294
1.75V/Cell	17.18	12.21	9.50	5.89	3.47	2.03	1.54	1.228	1.020	0.871	0.568	0.300
1.70V/Cell	18.73	12.94	10.07	6.13	3.54	2.07	1.57	1.249	1.038	0.887	0.578	0.305
1.67V/Cell	20.62	14.04	10.93	6.47	3.57	2.09	1.59	1.263	1.049	0.896	0.584	0.309
1.60V/Cell	22.33	14.77	11.50	6.75	3.61	2.11	1.61	1.276	1.060	0.906	0.591	0.312
Constant Power Discharge (CP,Unit:W) at 25℃(77℉)												
F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	32.27	22.93	17.85	11.07	6.53	3.81	2.90	2.31	1.92	1.64	1.07	0.56
1.80V/Cell	32.89	23.37	18.19	11.28	6.65	3.89	2.96	2.35	1.95	1.67	1.09	0.57
1.75V/Cell	33.50	23.81	18.53	11.49	6.77	3.96	3.01	2.39	1.99	1.70	1.11	0.59
1.70V/Cell	36.52	25.24	19.64	11.95	6.89	4.03	3.07	2.44	2.02	1.73	1.13	0.60
1.67V/Cell	40.20	27.38	21.31	12.62	6.97	4.07	3.10	2.46	2.05	1.75	1.14	0.60
1.60V/Cell	43.55	28.81	22.42	13.16	7.04	4.11	3.13	2.49	2.07	1.77	1.15	0.61